



SIRIUS, Extension module 3RK32 for modular Safety system 3RK3 4/8 F-DI, 24 V DC Can be parameterized via MSS ES 22.5 mm overall width screw terminal Up to SIL3 (IEC 61508) Up to Performance Level E (ISO 13849-1) without connection cable

General technical data		
Product brand name		SIRIUS
Product category		Modular Safety System
Product designation		Expansion module
Design of the product		4/8 F-DI
Protection class IP		IP20
Shock resistance		15g / 11 ms
Degree of pollution		3
Mounting position		vertical
Installation altitude at height above sea level maximum	m	2 000
Ambient temperature		
• during storage	°C	-40 ... +85
• during operation	°C	-20 ... +60
• during transport	°C	-40 ... +85
Relative humidity during operation	%	10 ... 95
Conducted interference due to burst acc. to IEC 61000-4-4		2 kV (power ports)

Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		2 kV
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV
Electrostatic discharge acc. to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling acc. to IEC 61000-4-3		10 V/m, 3 V/m, 1 V/m
Surge voltage resistance rated value	V	500
Insulation voltage rated value	V	50
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		K
Reference code acc. to DIN EN 61346-2		K
Product function		
• EMERGENCY OFF function		Yes
• protective door monitoring		Yes
• evaluation: electro-sensitive protective equipment		Yes
• evaluation: selector switch		Yes
• Pressure-sensitive mat monitoring		Yes
• evaluation: two-hand operator panel		Yes
• evaluation: enabling switch		Yes
• monitored start-up		Yes

Control circuit/ Control

Type of voltage		DC
Control supply voltage 1 at DC rated value	V	24
Operating range factor control supply voltage rated value of magnet coil		0.85 ... 1.15

Auxiliary circuit

Product function		
• Parameterizable outputs		No
Number of inputs		
• safety-related		8
• non-safety-related		0
Number of outputs		
• as contact-affected switching element safety-related		
— 1-channel		0
— 2-channel		0
• as contact-less semiconductor switching element		
— safety-related 2-channel		0
— non-safety-related 2-channel		0
• for testing contact-based sensors		2

Short-circuit protection

Design of the fuse link for short-circuit protection of non-solid-state switching element required

NH Typ 3NA, DIAZED Typ 5SB, NEOZED Typ 5SE

Installation/ mounting/ dimensions

Mounting type

standard rail

Width

mm

22.5

Height

mm

102

Depth

mm

124

Connections/Terminals

Type of electrical connection

screw-type terminals

Connectable conductor cross-section for auxiliary contacts

- single or multi-stranded
- finely stranded
- with core end processing

mm²

0.5 ... 4

mm²

0.5 ... 2.5

Certificates/approvals

General Product Approval

EMC

Functional Safety/Safety of Machinery



CSA



UL



RCM

[Type Examination Certificate](#)

[Miscellaneous](#)

Declaration of Conformity

Test Certificates

other

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)



Profibus

Safety related data

Safety Integrity Level (SIL) acc. to IEC 61508

3

Performance level (PL) acc. to EN ISO 13849-1

e

Category acc. to EN 954-1

4

PFHD with high demand rate acc. to EN 62061

1/h

0.0000000019

Average probability of failure on demand (PFDavg) with low demand rate acc. to IEC 61508

1/y

0.0000043

T1 value for proof test interval or service life acc. to IEC 61508

y

20

Protection against electrical shock

finger-safe

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK3211-1AA10>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK3211-1AA10>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK3211-1AA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK3211-1AA10&lang=en

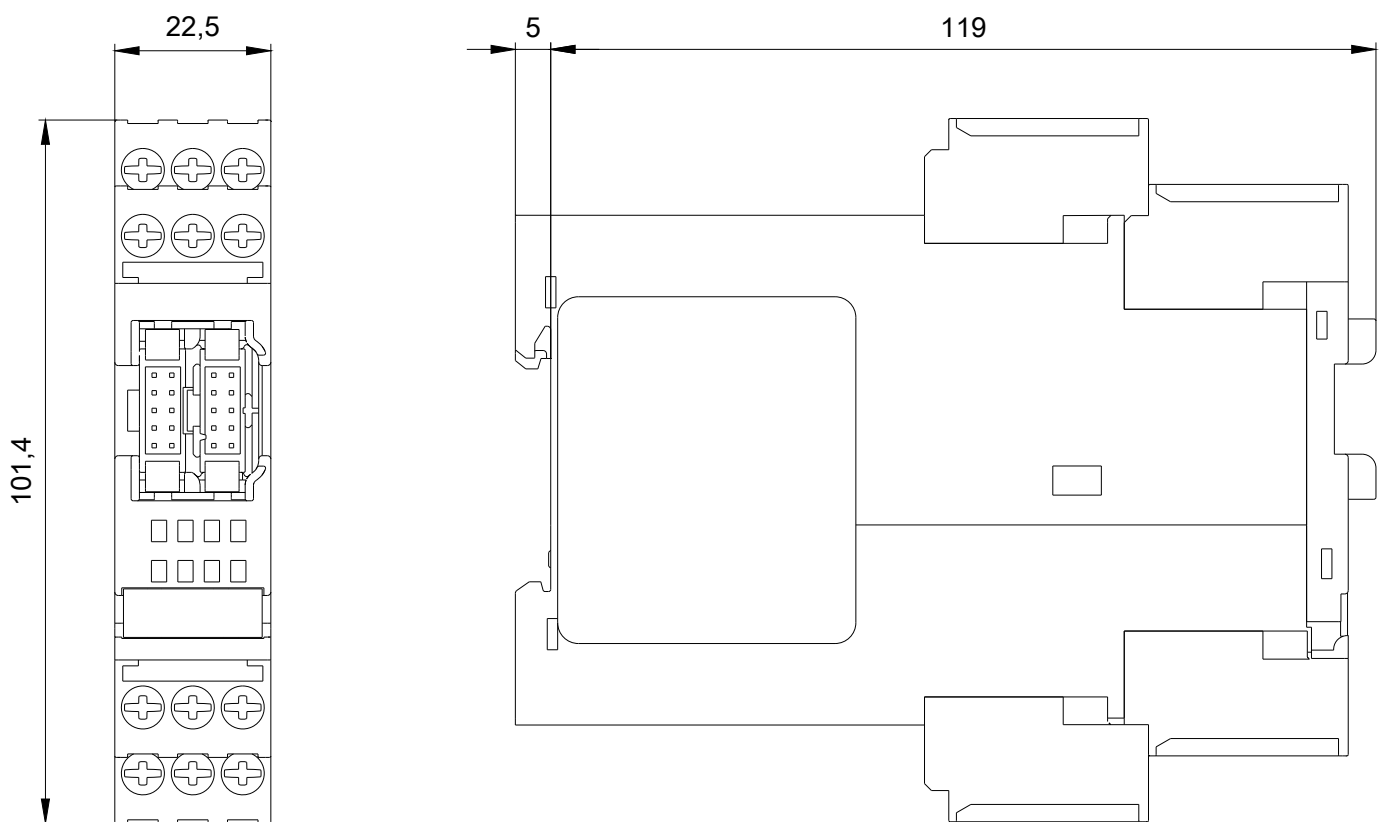

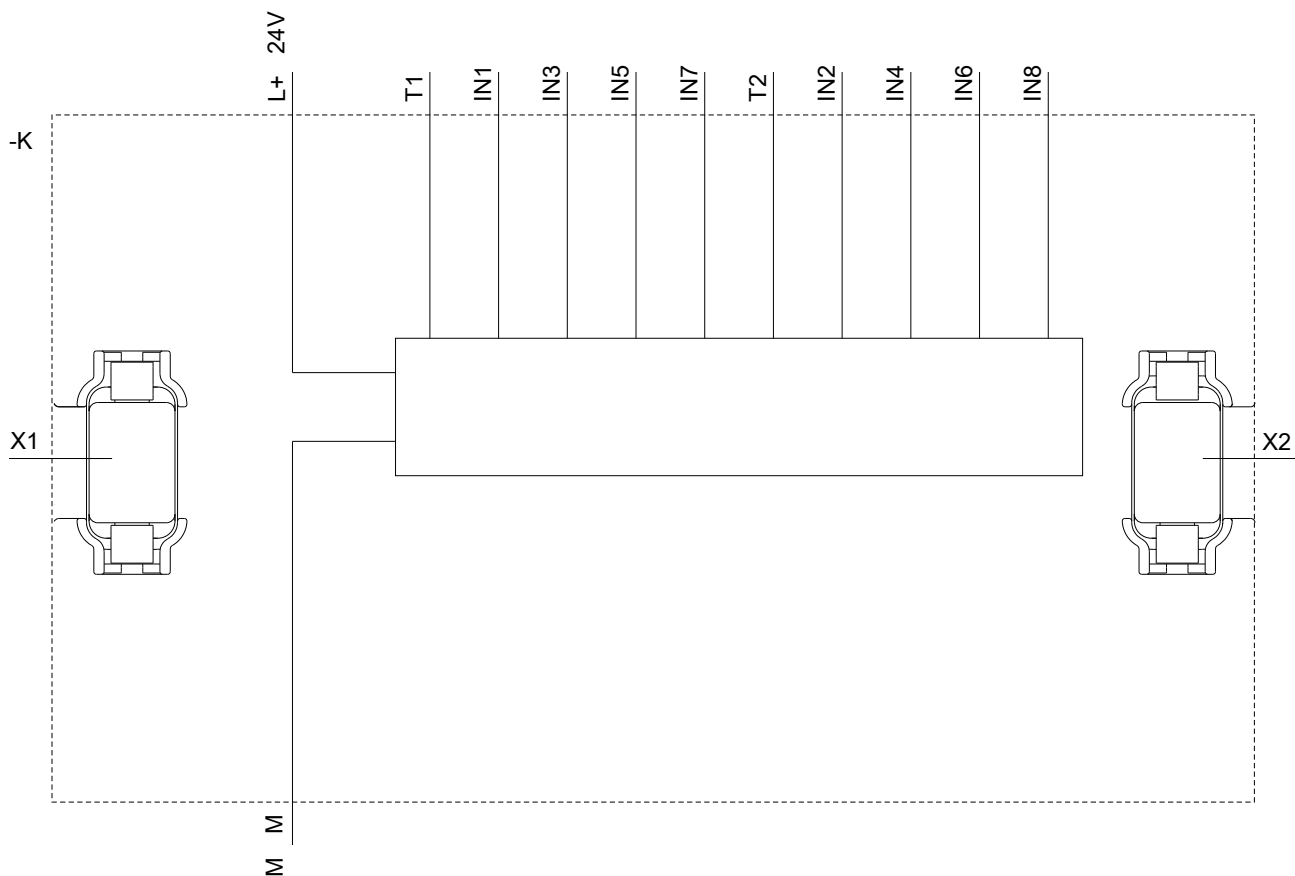

last modified:

06/12/2019 [🔗](#)