

Output coupling link Phased-out product !!! For further information, please contact our sales department Relay coupler, Screw terminals 1 change-over contact, 24 V AC/DC



Operating current of auxiliary contacts at DC-13 at 230 V

0.1 A

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TX7002-1BB00>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TX7002-1BB00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TX7002-1BB00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TX7002-1BB00&lang=en

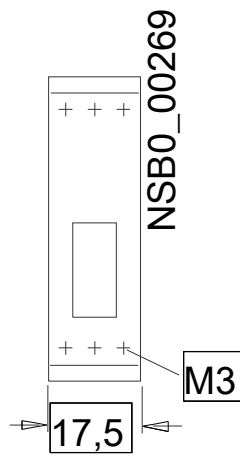

last modified:

06/06/2019 